

11-17-06
09/980220

PATENT

Attorney Docket No. 01925260

IN THE UNITED STATES PATENT AND TRADEMARK OFFICEIn re Application of:
Paulus Louis Guido Moers

Group Art Unit: 2682

U.S. Patent: 6,957,053 B1

Examiner: Marceau Milord

Filed: November 26, 2001

For: **METHOD FOR
SELECTION OF A
RECEIVER TUNING
FREQUENCY**

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" Mailing Label No: EV 113360521 US

Date of Deposit: November 15, 2006

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 CFR 1.10 on the date indicated above and is addressed to: Mail Stop: Certificate of Correction, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

Timothy M. Hubalik

(typed or printed name of person mailing paper or fee)

(signature of person mailing paper or fee)

Mail Stop: Certificate of Correction
Commissioner For Patents
P.O. Box 1450
Alexandria, VA 22313-1450

TRANSMITTAL LETTER

Dear Sir:

Transmitted herewith for the above-captioned patent application are:

1. Request for Certificate of Correction Pursuant to 37 C.F.R. § 1.322;
2. Form PTO/SB/44 Certificate of Correction with the proposed correction;
3. Check in the amount of \$100.00; and
4. Return Postcard acknowledging receipt of same.

Respectfully submitted,

November 15, 2006

By:
Richard A. Speer
Reg. No. 17,930

MAYER, BROWN, ROWE & MAW LLP
Customer No. 26565
P.O. Box 2828
Chicago, IL 60690-2828
Customer No. 26565
312-701-8605

NOV 21 2006

Certificate

NOV 21 2006

of Correction
NOV 21 2006



PATENT
Attorney Docket No. 01925260

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:
Paulus Louis Guido Moers

U.S. Patent: 6,957,053 B1

Filed: November 26, 2001

For: **METHOD FOR
SELECTION OF A
RECEIVER TUNING
FREQUENCY**

Mail Stop: Certificate of Correction
Commissioner For Patents
P.O. Box 1450
Alexandria, VA 22313-1450

) Group Art Unit: 2682

) Examiner: Marceau Milord

CERTIFICATE OF MAILING BY "EXPRESS MAIL"
"Express Mail" Mailing Label No: EV 113360521 US
Date of Deposit: November 15, 2006
I hereby certify that this paper or fee is being deposited with
the United States Postal Service "Express Mail Post Office
to Addressee" under 37 CFR 1.10 on the date indicated
above and is addressed to: Mail Stop: Certificate of
Correction, Commissioner for Patents, P.O. Box 1450,
Alexandria, VA 22313-1450

Timothy M. Hubalik

(typed or printed name of person mailing paper or fee)

(signature of person mailing paper or fee)

REQUEST FOR CERTIFICATE OF CORRECTION
PURSUANT TO 37 C.F.R. § 1.322

Pursuant to 37 C.F.R. § 1.322, the patentee, through the undersigned, requests that the following typographical error be corrected on the above-identified patent certificate.

On page one, item (22), the "Nov. 2, 2000" date was transposed on U.S. Application No. 09/980,220 when it was originally filed with the U.S. Patent and Trademark Office. (A copy of WO 00/74237 A1 is attached for clarification.) The corrected date should read "February 11, 2000". Applicant also includes Form PTO/SB/44 listing the correction to item (22).


Applicant respectfully submits that this Request for Certificate of Correction does not introduce any new matter and would not alter the substance of the patent in any way

NOV 21 2006

that would necessitate reevaluation by an Examiner. If any additional information is required, the Patent Office is invited to contact the undersigned at 312-701-8593. A check in the amount of [\$100] is included to cover the cost associated with issuing the Certificate of Correction. The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication to our Deposit Account No. 13-0019.

Respectfully submitted,

By:


Richard A. Speer
Reg. No. 17,930

MAYER, BROWN, ROWE & MAW LLP
Customer No. 26565
P.O. Box 2828
Chicago, IL 60690-2828
312-701-8605

DATE: November 15, 2006

NOV 21 2006

UNITED STATES PATENT AND TRADEMARK OFFICE CERTIFICATE OF CORRECTION

Page 1 of 1

PATENT NO. : 6,957,053 B1

APPLICATION NO.: 09/980,220

ISSUE DATE : October 18, 2005

INVENTOR(S) : Paulus Louis Guido Moers

It is certified that an error appears or errors appear in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

First page item (22) PCT Filed: "Nov. 2, 2000" -- Date should read "February 11, 2000"

MAILING ADDRESS OF SENDER (Please do not use customer number below):

Richard A. Speer, Mayer, Brown, Rowe & Maw LLP, P.O. Box 2828, Chicago, IL 60690-2828

This collection of information is required by 37 CFR 1.322, 1.323, and 1.324. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.0 hour to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Attention Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

NOV 21 2006

Method for selection of a receiver tuning frequency

The invention relates to a method for selecting a tuning frequency for receiving an RF transmitter within an RF frequency band and an FM receiver executing the method.

An FM receiver executing the above method is on itself known e.g. from European Patent 0 333 194. The known FM receiver complies with the FM RDS broadcasting standard as defined in 'Specification of the Radio Data System FM RDS for VHF-FM Sound Broadcasting' by the European Broadcasting Union (EBU), EBU document Tech 3244-E, March 1984 and updated in the subsequent revisions thereof. Reference is made to this document for a correct understanding of the meaning and definition of the various terms used hereinafter in connection with the FM RDS standard.

The cited FM receiver comprises a first or stationary tuner circuit and a second or scanning tuner circuit. The stationary tuner circuit is used to tune the receiver to a broadcast transmitter station with a wanted audio program, hereinafter indicated as first transmitter frequency, and to process the audio program signals for sound reproduction. If the transmitter transmits RDS data as well, then the stationary tuner circuit will also extract the RDS data carried by the received RDS transmitter signal, in particular a list of alternative frequencies (AFs). Such list provides tuning data of transmitters carrying the same program as the one the stationary tuner circuit is actually tuned to. The scanning tuner circuit is used to monitor the reception quality of the transmitter signals at each of those AFs. For this, the scanning tuner circuit is sequentially switched to each AF in the AF list to measure the fieldstrength of the transmitter signals at the respective AFs. The fieldstrength information is stored in a memory and repeatedly updated in sequential scan cycles. On deterioration of the received stationary transmitter signal, hereinafter indicated as first transmitter frequency, the

stationary tuner circuit is automatically switched over in its tuning from said first transmitter frequency to another transmitter frequency, hereinafter indicated as second transmitter frequency. In the known receiver, the AF stored
5 in the memory having highest fieldstrength is chosen to be such second transmitter frequency. However, the reception quality measurement is based on the momentary fieldstrength of the RF FM reception signal and the AF having highest fieldstrength at the moment of tuning switch over may lose
10 this position very quickly, due to fluctuations in the environmental reception conditions. This may cause instabilities in the tuning of the receiver. Furthermore, in this known receiver, the selection of a second transmitter frequency is limited to the AFs included in the RDS AF list,
15 being alternative frequencies carrying the same audio program as the first transmitter frequency.

An object of the invention is to improve the tuning behaviour of the above mentioned receiver.

To this end, a method for selecting a tuning frequency
20 for receiving an RF transmitter within an RF frequency band is characterized by a band scanning search for detecting transmitters exceeding a predetermined reception quality level, by storing the tuning data thereof and allocating thereto a permanency factor indicating the permanency in
25 reception quality thereof, said tuning frequency being selected on the basis of at least said permanency factor.

An FM receiver executing the method according to the invention comprising first and second tuner circuits
30 respectively for receiving a first FM transmitter and for detecting in an FM band FM transmitters received with a reception quality exceeding a predetermined quality threshold level, and storage means for storing the tuning data of the so detected FM transmitters, the first tuner
35 circuit switching over from an actually received first FM transmitter to a second FM transmitter selected from the

detected FM transmitters when the reception quality of the first FM transmitter decreases below a predetermined level, is therefore characterized by a processing unit allocating to each detected FM transmitter a permanency factor
5 indicating the permanency in reception quality thereof, said selection of the second FM transmitter being based on at least said permanency factor.

By the measure according to the invention the criteria for selecting a second transmitter are not only based on the
10 reception quality or fieldstrength thereof, but also on the duration or permanency of the reception quality. The longer the reception quality is in excess of said predetermined minimum level, the more reliable and stable the reception of the transmitter signal in question is. By tuning the
15 stationary tuner circuit to such a transmitter, the tuning behaviour of the stationary tuner will be stabilised.

To allow easy implementation, the method is preferably characterized in that the band scanning search is being repeated in subsequent scan cycles, each detected
20 transmitter increasing respectively decreasing in permanency factor dependent on the detection respectively the absence of detection thereof in subsequent scan cycles.

An FM receiver executing said preferred method is characterized by tuning control means controlling the tuning
25 of the second tuning circuit to repeat the band scanning search in subsequent scan cycles, the processing unit increasing, respectively decreasing, stepwise the permanency factor of a transmitter at each detection, respectively in the absence of detection, thereof in a subsequent scan
30 cycle.

In a further preferred method the tuning data of transmitters having a permanency factor decreasing below a predetermined permanency threshold level are being erased to exclude such transmitters from being selected.

35 An FM RDS receiver executing said preferred method is characterized in that the storage locations of tuning data

relating to transmitters decreasing in permanency factor below a predetermined permanency threshold level, being released for storage of other transmitter data.

5 This measure further improves the efficiency in the use of memory capacity without losing the information which transmitter frequency should be chosen in case the actually received transmitter signal decreases below said predetermined threshold level.

10 Furthermore, the band scanning search will reveal all transmitters in the FM band meeting the minimum reception quality requirement. This allows to apply said selection of the second transmitter frequency also when changes in the audio program are permitted or wanted. Dependent on the user's choice, such second transmitter frequency may carry
15 an audio program signal different from the actually received one, but falling e.g. within the same PTY category, and/or including traffic messages. The selection is therewith PTY determined. RDS program codes may be used for the identification of such audio programs.

20

In an FM receiver capable of receiving RDS signals implementing such selection the processing unit repeatedly monitors the permanency factor of the FM transmitters carrying an audio program within the same PTY category as
25 the audio program of the first FM transmitter.

In another preferred method according to the invention the second transmitter is selected from FM transmitters carrying traffic messages on the basis of fieldstrength in addition to the permanency factor.

30 In an FM receiver capable of receiving RDS signals executing this method the processing unit operates to monitor the permanency factor of FM transmitters carrying traffic message information as well as the fieldstrength thereof, the second FM transmitter being selected from the
35 detected FM transmitters upon receiving a traffic

announcement signal on the basis of fieldstrength in addition to the permanency factor.

The fieldstrength is used in this measure to identify the nearest transmitter sending traffic messages, which are most relevant to the actual location of the user because of the proximity of the transmitter.

These and further aspects and advantages of the invention will be discussed in more detail hereinafter with reference to the disclosure of preferred embodiments, and in particular with reference to the appended Figures that show:

Figure 1 a blockdiagram of a dual tuner FM RDS receiver according to the invention;

Figure 2 an organisational scheme of the list of transmitter related data as stored in the FM RDS receiver of Figure 1;

Figure 3 a flowchart illustrating the method according to the invention as being executed by the FM RDS receiver of Figure 1.

20

Figure 1 shows a blockdiagram of an FM receiver according to the invention, which in the preferred embodiment as shown complies with the FM RDS broadcasting standard as defined in above cited EBU document. Reference is made to this document for detailed information on the meaning and definition of the various terms and abbreviations relating to the RDS standard, as mentioned hereinafter.

The FM receiver receives RF FM signals through an antenna 1 and following this antenna 1, it comprises first and second tuner circuits 2 and 3, the tuning frequency thereof being controlled from tuning control means 10, 11, 25. The tuning control means 10, 11, 25 comprise a central processing unit (CPU) 25 and an I/O control module 11 being included in a microprocessor 12 and connected through a control bus 10 to the first and second tuner circuits 2 and

3. By manual operation of one of keys 21-24 the tuning frequency of the first tuner circuit 2 can be set through a user interface I/O module 20 to the transmitter frequency f_t of a wanted FM broadcast station. Key 21 is to activate an autostore functionality, key 22 is to activate an up/down search, key 23 is to switch on/off the reception of traffic messages and key 24 is to activate a search for programs within the same PTY category as the one actually received. These functionalities require the use of a program memory 26 for the storage of program software and a timer module 28 and are on themselves already known from e.g. the FM RDS radio receiver type VDO RC 959 RDS. The first tuner circuit 2 provides for the stationary selection and demodulation of a wanted RF FM broadcast signal into baseband and comprises means to measure the reception quality of the received FM RF signal. A quality factor reflecting said reception quality is supplied via a quality level line 14 to an AD converter module 15 of the microprocessor 12 to be further processed as described hereinafter.

Dependent on the content of the received FM broadcast signals, the baseband FM modulation signal may comprise an RDS signal and/or a mono or stereomultiplex signal. This baseband signal is supplied via a signal line 5 from an output of the first tuner circuit 2 to a digital signal processor 6. The digital signal processor 6 comprises audio signal processing means (not shown) to process mono audio signals and eventually demultiplex stereomultiplex signals into stereo left and right audio signals. These stereo left and right audio signals are supplied to an audio amplifier 8 and subsequently to a stereo loudspeaker set 9 for respectively amplification and reproduction thereof.

The digital signal processor 6 is coupled to an RDS decoder 7 to decode RDS data contained in the received FM broadcast signal. The decoded RDS data are supplied via an RDS data line 18 to an RDS data I/O module 19 of the

microprocessor 12. RDS data processing occurs under control of the CPU 25 of the microprocessor 12.

The tuning frequency of the second tuner circuit 3 is automatically varied by the tuning control means 10, 11, 25 to scan over the full RF FM broadcast reception band ranging from 87.5 MHz to 108 MHz, starting from e.g. the lower end of said RF FM band. The scanning operation will be interrupted upon first reception of an FM broadcast station fx having a signal reception quality exceeding a certain predetermined threshold level qt (hereinafter also indicated as scan hit). During an interruption interval, measurement, processing and storage steps are being made under control of the CPU 25, as described in the following with reference to Figure 2.

1. the tuning data of fx is stored at a storage address Tx of a data memory 27 of the microcontroller 12;

2. a permanency factor px is being allocated to fx; set at unity value and stored at Tx;

3. the actual reception fieldstrength is measured and a fieldstrength factor sx reflecting said reception fieldstrength is stored at Tx;

An RDS decoder 4 following the output of the second tuner circuit 3 is to extract RDS data from the demodulated RDS signal, if fx is carrying such RDS data. The RDS data is supplied via an RDS data line 16 to an RDS data I/O module 17 of the microprocessor 12 and the various program related RDS codes included therein, such as e.g. the PTY-, TA-, TMC-, PS-, and/or PS Mask codes, are stored in said data memory at the storage address Tx of fx. Eventually an RDS flag NW identifying RDS transmitters with value 1 and non-RDS transmitters with value 0 may be stored in TX as well.

After these steps have been completed for fx, the scanning is resumed until it is interrupted again, when the next FM broadcast station fy in the RF FM broadcast reception band having a signal reception quality exceeding

qt is detected. The above measurement, processing and storage steps are repeated for fy, the tuning data thereof, as well as a permanency factor py and a fieldstrength factor sy, eventually along with RDS program data are being stored
5 in the data memory at storage address Ty. These steps are repeated for each such FM broadcast station until the full RF FM broadcast reception band has been scanned, whereafter the scanning operation is repeated, either in the same or in reversed scan direction.

10 The reception quality may be based on one or more parameters, such as e.g. the reception fieldstrength, the (lack of) multipath and other environmental sources of pollution. The above predetermined threshold level qt is chosen such, that RF FM broadcast signals exceeding this
15 level can be processed properly without giving rise to receiver malfunctioning and/or noticeable signal distortions.

For a practical implementation of the detection of FM broadcast stations having a signal reception quality
20 exceeding a certain predetermined threshold level qt, reference is made to above cited car radio receiver type VDO RC 959 RDS, where a similar feature is used under its so-called autostore functionality. Said known receiver also provides a reference for the measuring of the actual
25 reception fieldstrength of certain transmitters and the storage of a fieldstrength factor sx reflecting said reception fieldstrength, the retrieval of various program related RDS codes included in the received RF FM signal, such as e.g. the PTY, TA-, TMC-, PS-, and/or PS Mask codes
30 and the storage of these data in a data memory at storage addresses related to the relevant transmitter frequencies. The known receiver is based on a single tuner concept and provides said functionalities during short muting intervals in the reproduction of the main audio program being limited
35 to AFs only, i.e. transmitter frequencies carrying the same audio program as the stationary received one.

If in a subsequent scan operation fx is detected again, which means that the reception quality of fx still exceeds the predetermined threshold level qt, then the permanency factor px is incremented with unity value, thus resulting in
5 px=2. A maximum to the permanency factor can be set, e.g. at three, which means that any scan hits on fx following up to the third one in a row will have no effect on this maximum value of px=3.

If after a scan hit, fx fails to appear in a subsequent
10 scan (hereinafter also indicated as an empty scan), then px will decrement with unity value, each time a subsequent scan appears to be empty on fx. The minimum value of px is set at px=0, which is obtained in at most three empty scans in a row. Any empty scan following the third one in a row, will
15 have no effect on this minimum value of px=0. If px decreases below a permanency threshold level, which in this receiver is set at px=1 (unity), then all data in the data memory at the storage address Tx of fx will be removed. This removal of data is in practise effected by releasing the
20 relevant storage locations for the storage of new data.

As long as px differs from zero, the last measured fieldstrength factor sx is stored at the storage address Tx of fx, while overwriting the prior one.

In contrast with said known receiver, the second tuner
25 circuit 3 of the FM receiver according to the invention collects not only transmitter data of AFs only, but of all transmitters exceeding the predetermined reception quality level qt. This allows to offer the user a broader range of options in automatically selecting audio programs.

30 For instance, by activating the 'autostore' option with key 21, the fieldstrength factor of the various transmitters stored in the data memory may be compared with a certain threshold level, chosen such that it is exceeded by only a limited number of transmitters (e.g. 10), which can be RDS-
35 or non-RDS transmitters. The tuning data of these transmitters are stored in the autostore memory and called

up by touching the key 21. According to the invention the threshold level may be based on a predetermined threshold value for the permanency factor, eventually in combination with a predetermined threshold value for the fieldstrength factor.

5 This also applies to the threshold level for use in the up/down search of transmitters, which feature can be activated with key 22.

The various program related RDS codes like PTY, TP and TA are used to offer the user options in automatically
10 selecting within the category of programs indicated therewith, the best receivable transmitter from those having these codes stored in the data memory of the receiver. The availability of the tuning data of all receivable transmitters in the data memory of the receiver, together
15 with the permanency factor and the fieldstrength factor thereof allow to immediately identify within a certain RDS program category, which in terms of these factors is the best to receive transmitter.

A switching of the tuning of the first tuner circuit 2
20 to the best to receive transmitter carrying a program within the same PTY category as the one the first tuner is actually tuned to, is activated with key 24.

By an operation of key 23, the receiver can be set to reproduce traffic messages. In accordance with the
25 invention, the criterium to select an appropriate traffic message transmitting RDS broadcast station amongst those carrying the traffic announcement flag is based on the permanency factor, i.e. the best to receive RDS traffic message broadcast station having the highest permanency
30 factor. If the highest permanency factor is shared by various transmitters, then the fieldstrength factor may additionally be used to come to the one best to receive. The transmitter received strongest (i.e. with highest fieldstrength) is in practice nearest to the receiver
35 location and the traffic messages of that transmitter are therewith most relevant to the user.

Figure 3 shows a flowchart of an algorithm for collecting and updating transmitter and RDS program related data to be used in a method for tuning the reception of radio broadcast signals to an FM transmitter in accordance with the invention, in which steps a1-a15 have the following meaning:

a1 Switching on the radio and starting the method according to the invention.

for selecting a tuning frequency for receiving an RF FM transmitter within an RF FM frequency band

a2 The second tuner circuit 3 is initialised for starting a scan cycle from the lower end of the FM frequency band at 87.5 MHz. The data memory 27 is initialised for transmitter and RDS program related data storage .

a3 The tuning frequency of the second tuner circuit 3 is being increased to scan the FM and interrupted upon reception of a transmitter fx. During an interruption period the signal reception quality (this can be the fieldstrength or other parameters defining the reception quality level) of fx is measured. In the following the fieldstrength is taken as a measure for the reception quality. Store a fieldstrength factor sx reflecting the fieldstrength of fx at a storage address Tx of the data memory 27.

a4 If the fieldstrength factor sx exceeds the threshold level qt then go to a9. Otherwise go to a5.

a5 The fieldstrength factor sx is not good enough. Check now the permanency factor px of fx. If this px is not equal to zero (which means fx has been detected in at least the preceding scan), then goto a6. If px=0 then goto a7.

a6 Decrement px with unity value.

a7 px=0: clear all data from the storage address Tx of the data memory 27.

a8 Resume the scanning operation. If the end of the FM band (108,0 MHz) is reached, go to a3 to start a subsequent scan cycle, starting again from the lower end of the FM band (87.5 MHz).

5 a9 The fieldstrength factor sx exceeds qt. Wait some time to check whether fx carries RDS information.

a10 Is the PI code received. If so, go to a11, otherwise go to a 12.

10 a11 Set the RDS flag NW at 1 and store all RDS data at Tx of data memory 27.

a12 Check the RDS flag NW at Tx. If NW=1, go to a13, otherwise go to a14.

a13 Clear the RDS flag by setting NW to 0.

a14 Clear all RDS data at Tx

15 a15 The reception quality was OK. Increment px with unity value (until maximum at px=3 has been reached).

The data memory 27 therewith contains at any time the
20 most recent status of the receivable transmitters in the FM band in terms of momentary reception quality or fieldstrength sx and permanency or stability of reception quality px. The continuous availability of the abovementioned transmitter related data in an FM receiver
25 according to the invention allows to determine immediately which transmitter within the FM band provides optimal reception conditions, i.e. which transmitter within the FM band has highest permanency factor px. If the highest px value is shared by several transmitters, then the
30 fieldstrength factor sx may be taken additionally to determine the best to receive transmitter. The availability of program related RDS data allows to restrict the group of transmitters to be considered for the above determination of the best to receive transmitter. If, for instance, the user
35 is only interested in hearing a specific audio program with optimal quality, then in accordance with the invention it

should be determined, which transmitter having the PI code identifying said specific audio program has highest permanency factor px amongst those detected within the FM band. Similarly, the group of transmitters to be considered
5 for the above determination in case the user is interested in any audio program within a certain PTY category, is limited to those transmitter carrying the RDS PTY code of said category. Accordingly, in determining the best to receive traffic message broadcast transmitter station, use
10 can be made of the RDS TA code to limit the group of transmitters to be considered therefor.

The invention is not restricted to the embodiments described above and may well be used in e.g. a non-RDS receiver for implementing an 'autostore' functionality,
15 wherein a number of strongest transmitters are being stored under a same number of tuner preselection keys. Furthermore, the functions of the first and second tuner circuits 2 and 3 may well be performed with a single tuner, in which the stationary reception is repeatedly shortly interrupted to
20 allow the tuner during each interruption period to scan through a part of the FM band covering the whole FM band after a number of interruption periods.

Claims:

1. Method for selecting a tuning frequency for receiving an RF transmitter within an RF frequency band characterized by a band scanning search for detecting transmitters exceeding a predetermined reception quality level, by storing the tuning data thereof and allocating thereto a permanency factor indicating the permanency in reception quality thereof, said tuning frequency being selected on the basis of at least said permanency factor.

2. Method according to claim 1, characterized in that the band scanning search is being repeated in subsequent scan cycles, each detected transmitter increasing respectively decreasing in permanency factor dependent on the detection respectively the absence of detection thereof in subsequent scan cycles.

3. Method according to claim 2, characterized by erasing the tuning data of transmitters having a permanency factor decreasing below a predetermined permanency threshold level.

4. Method according to one of claims 1 to 3, characterized by an RF transmitter being selected from detected transmitters carrying audio programs belonging to a predetermined PTY category.

5. Method according to one of claims 1 to 3, characterized by an RF transmitter being selected from detected FM transmitters carrying traffic messages on the basis of fieldstrength in addition to the permanency factor.

6. FM receiver comprising first and second tuner circuits respectively for receiving a first FM transmitter and for detecting in an FM band FM transmitters received with a reception quality exceeding a predetermined quality threshold level, and storage means for storing the tuning data of the so

detected FM transmitters, the first tuner circuit switching over from an actually received first FM transmitter to a second FM transmitter selected from the detected FM transmitters when the reception quality of the first FM transmitter decreases below a predetermined level, characterized by a processing unit allocating to each detected FM transmitter a permanency factor indicating the permanency in reception quality thereof, said selection of the second FM transmitter being based on at least said permanency factor.

7 FM receiver according to claim 6, characterized by tuning control means varying the tuning of the second tuner circuit to repeat the band scanning search in subsequent scan cycles, the processing unit increasing, respectively decreasing, stepwise the permanency factor of a transmitter at each detection, respectively in the absence of detection, thereof in a subsequent scan cycle.

8 FM receiver according to claim 7, characterized in that the storage locations of tuning data relating to transmitters decreasing in permanency factor below a predetermined permanency threshold level, being released for storage of other transmitter data.

9 FM receiver according to one of claims 6 to 8 capable of receiving RDS signals, characterized in that in selecting the second FM transmitter the processing unit continuously monitors the permanency factor of the FM transmitters carrying an audio program in the same PTY category as the audio program of the first FM transmitter.

10. FM receiver according to claim 6 or 8 capable of receiving RDS signals, characterized in that the processing unit operates to monitor the permanency factor of FM transmitters carrying traffic message information as well as the fieldstrength thereof, the

second FM transmitter being selected from the detected FM transmitters upon receiving a traffic announcement signal on the basis of fieldstrength in addition to the permanency factor.

1 / 3

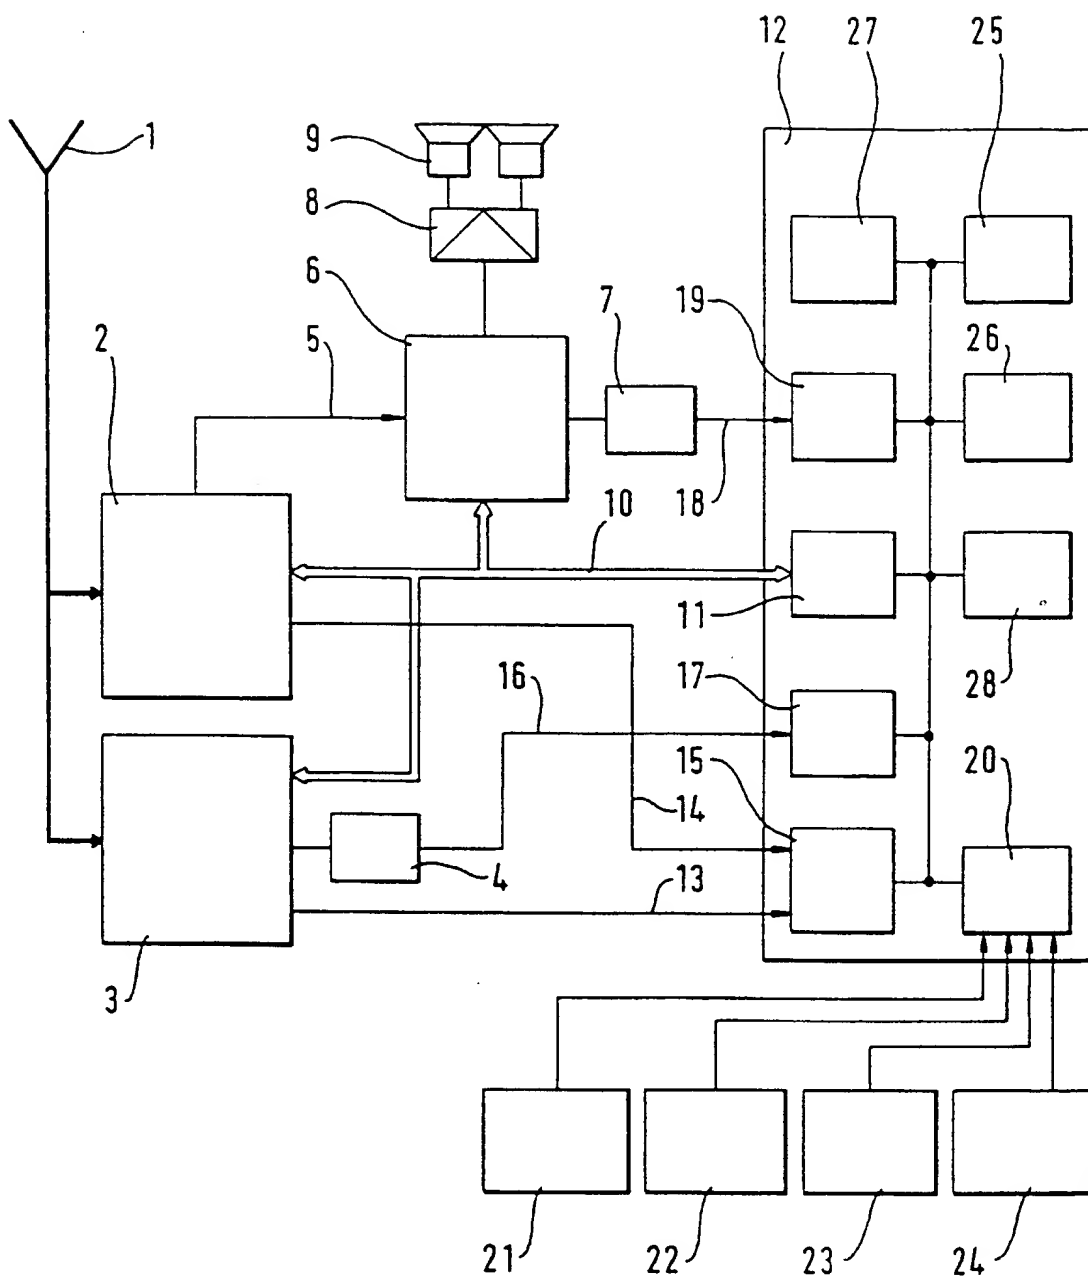


Fig. 1

NOV 21 2006

RDS freq 0 (87.5 MHz)		RDS freq 205 (108.0 MHz)	
T...		T...	
T1		T1	
f1 p1:1 NW:0 s1:16 PI=0, PTV=0, TA=0, TMC=0, PS="..." PS_MASK		f2 p2:3 NW:1 s2:14 PI=841C PTV=0, TA=0, TMC=0, PS="BRAB./Z0", PS_MASK	
T2		T2	
T3		T3	
T4		T4	
T5		T5	
T6		T6	
T7		T7	
T8		T8	
T9		T9	
T10		T10	
T11		T11	
T12		T12	
T13		T13	
T14		T14	
T15		T15	
T16		T16	
T17		T17	
T18		T18	
T19		T19	
T20		T20	
T21		T21	
T22		T22	
T23		T23	
T24		T24	
T25		T25	
T26		T26	
T27		T27	
T28		T28	
T29		T29	
T30		T30	
T31		T31	
T32		T32	
T33		T33	
T34		T34	
T35		T35	
T36		T36	
T37		T37	
T38		T38	
T39		T39	
T40		T40	
T41		T41	
T42		T42	
T43		T43	
T44		T44	
T45		T45	
T46		T46	
T47		T47	
T48		T48	
T49		T49	
T50		T50	
T51		T51	
T52		T52	
T53		T53	
T54		T54	
T55		T55	
T56		T56	
T57		T57	
T58		T58	
T59		T59	
T60		T60	
T61		T61	
T62		T62	
T63		T63	
T64		T64	
T65		T65	
T66		T66	
T67		T67	
T68		T68	
T69		T69	
T70		T70	
T71		T71	
T72		T72	
T73		T73	
T74		T74	
T75		T75	
T76		T76	
T77		T77	
T78		T78	
T79		T79	
T80		T80	
T81		T81	
T82		T82	
T83		T83	
T84		T84	
T85		T85	
T86		T86	
T87		T87	
T88		T88	
T89		T89	
T90		T90	
T91		T91	
T92		T92	
T93		T93	
T94		T94	
T95		T95	
T96		T96	
T97		T97	
T98		T98	
T99		T99	
T100		T100	
T101		T101	
T102		T102	
T103		T103	
T104		T104	
T105		T105	
T106		T106	
T107		T107	
T108		T108	
T109		T109	
T110		T110	
T111		T111	
T112		T112	
T113		T113	
T114		T114	
T115		T115	
T116		T116	
T117		T117	
T118		T118	
T119		T119	
T120		T120	
T121		T121	
T122		T122	
T123		T123	
T124		T124	
T125		T125	
T126		T126	
T127		T127	
T128		T128	
T129		T129	
T130		T130	
T131		T131	
T132		T132	
T133		T133	
T134		T134	
T135		T135	
T136		T136	
T137		T137	
T138		T138	
T139		T139	
T140		T140	
T141		T141	
T142		T142	
T143		T143	
T144		T144	
T145		T145	
T146		T146	
T147		T147	
T148		T148	
T149		T149	
T150		T150	
T151		T151	
T152		T152	
T153		T153	
T154		T154	
T155		T155	
T156		T156	
T157		T157	
T158		T158	
T159		T159	
T160		T160	
T161		T161	
T162		T162	
T163		T163	
T164		T164	
T165		T165	
T166		T166	
T167		T167	
T168		T168	
T169		T169	
T170		T170	
T171		T171	
T172		T172	
T173		T173	
T174		T174	
T175		T175	
T176		T176	
T177		T177	
T178		T178	
T179		T179	
T180		T180	
T181		T181	
T182		T182	
T183		T183	
T184		T184	
T185		T185	
T186		T186	
T187		T187	
T188		T188	
T189		T189	
T190		T190	
T191		T191	
T192		T192	
T193		T193	
T194		T194	
T195		T195	
T196		T196	
T197		T197	
T198		T198	
T199		T199	
T200		T200	
T201		T201	
T202		T202	
T203		T203	
T204		T204	
T205		T205	
T206		T206	
T207		T207	
T208		T208	
T209		T209	
T210		T210	

3 / 3

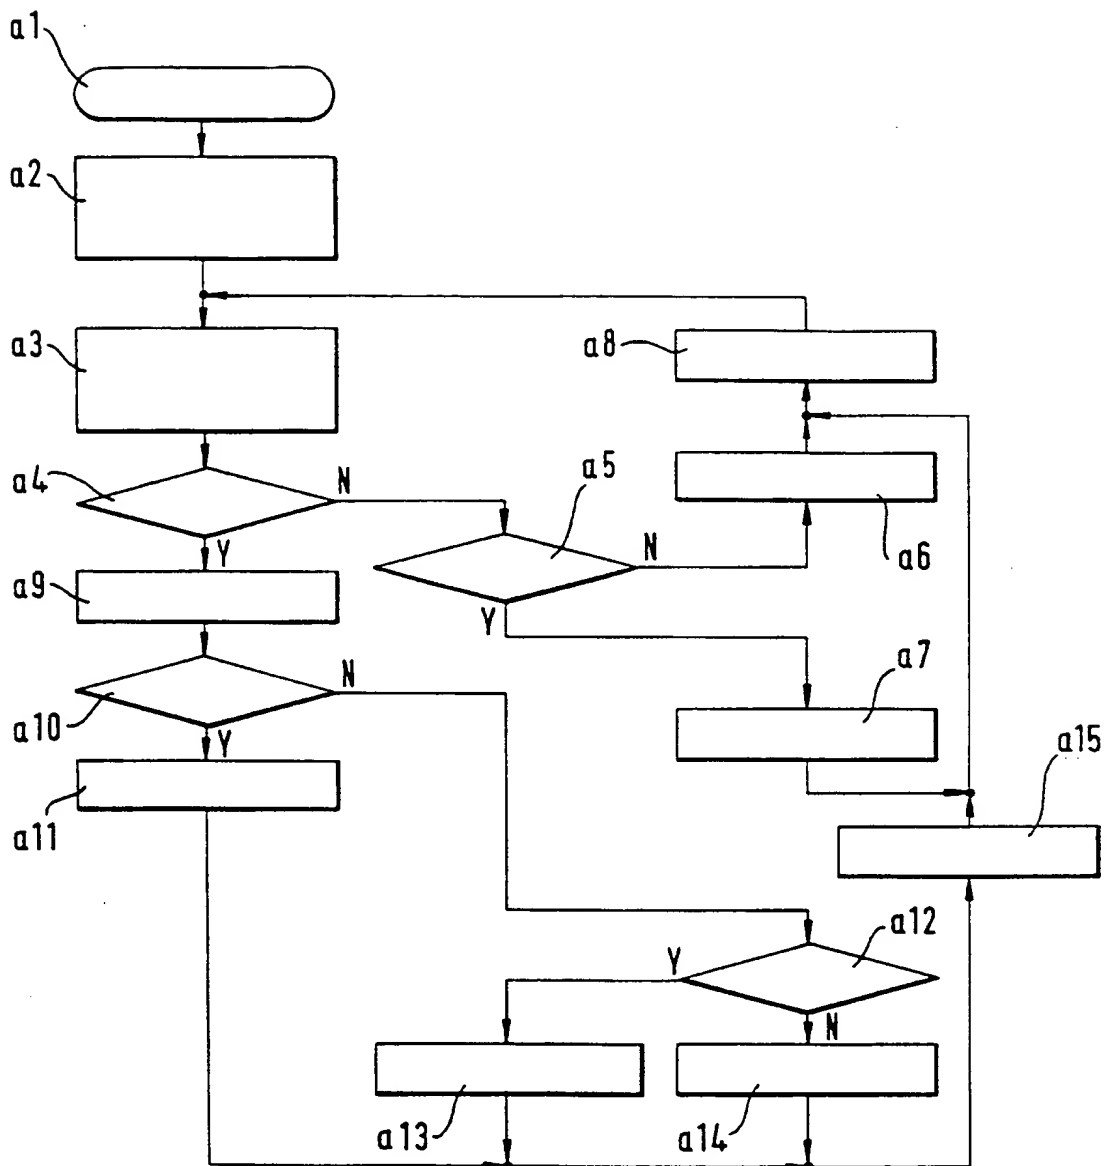


Fig. 3

NOV 21 2006

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H03J1/00 H03J7/18		International Application No PCT/EP 00/01119
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H03J H04H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 333 194 A (SANYO ELECTRIC CO ; TOKYO SANYO ELECTRIC CO (JP)) 20 September 1989 (1989-09-20) cited in the application abstract	1-10
A	DE 41 12 705 A (PIONEER ELECTRONIC CORP) 31 October 1991 (1991-10-31) claim 2	1-10
A	EP 0 459 360 A (GRUNDIG EMV) 4 December 1991 (1991-12-04) column 4, line 41 - column 6, line 36; claim 2	6-8,10
A	US 5 457 815 A (MOREWITZ II HERBERT) 10 October 1995 (1995-10-10) column 4, line 20 - line 39	4,9
<input type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">21 June 2000</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">28/06/2000</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Peeters, M</div>

NOV 21 2000

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 00/01119

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0333194 A	20-09-1989	AT 154733 T DE 68928131 D DE 68928131 T JP 2124648 A JP 2760552 B KR 9608949 B	15-07-1997 24-07-1997 15-01-1998 11-05-1990 04-06-1998 10-07-1996
DE 4112705 A	31-10-1991	JP 4004615 A GB 2244615 A,B US 5303400 A	09-01-1992 04-12-1991 12-04-1994
EP 0459360 A	04-12-1991	DE 4017756 A DE 59106704 D	05-12-1991 23-11-1995
US 5457815 A	10-10-1995	NONE	

NOV 21 2006